





Specifications	
Input Power	120-277 VAC Max
Power Consumption	36 Watts
Replacement Lamps	AS-IH-1024(27,000 hrs Lamp Life)

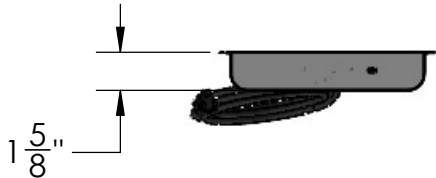

SOLARIS® SLX
POWERPRO-4LV IAQ
Control Center

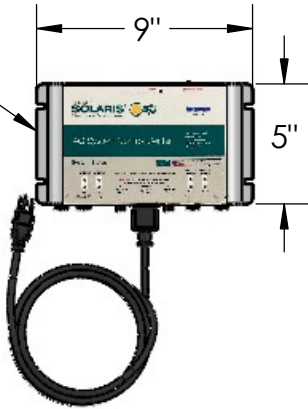


6 Foot Lamp
Lead Included

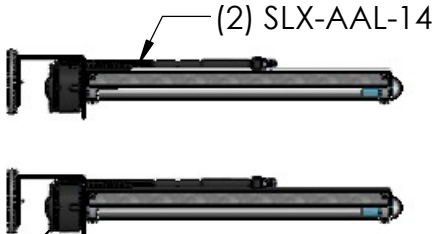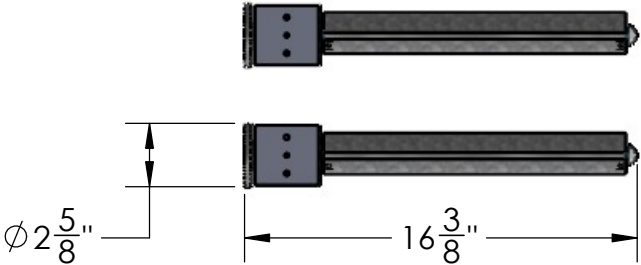


(2) SLX-AAL-14

Option 1 Mounting
(2) SLX-AAL-14
Locations

Option 2 Mounting
(2) SLX-AAL-14
Locations

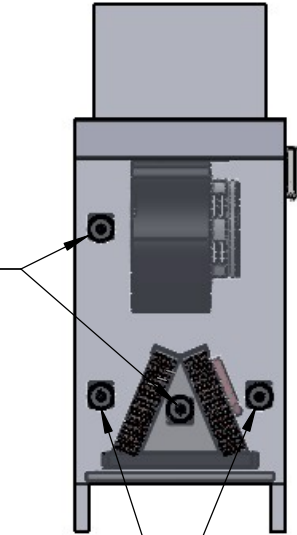

Air Handler Configuration

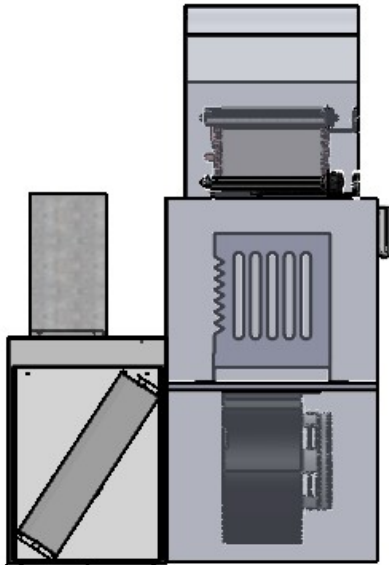


Shown with RAM
Part # 90-027
Sold separately


Furnace Configuration

SOLARIS® SLX
POWERPRO-4LV
IAQ Control Center

Air supply to
rooms

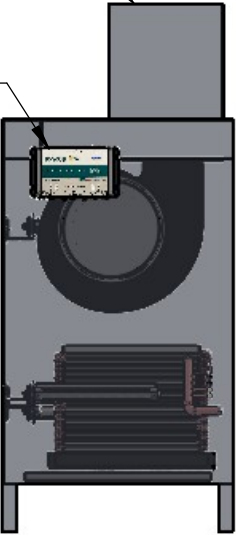

Typical Mounting
(2) SLX-AAL-14

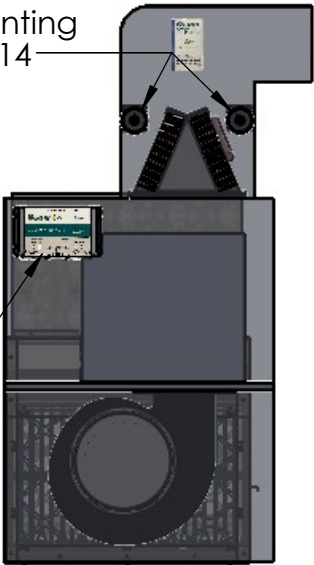

SOLARIS® SLX
POWERPRO-4LV
IAQ Control Center

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ULTRAVATION. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF ULTRAVATION IS
PROHIBITED.

Ultravation® Better Air Better Water Better Living™		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: Solaris® SLX POWERPRO-4LV IAQ Control Center with (2) SLX-AAL-14
ULTRAVATION, INC.		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN	H Kelley	
67 TUBBS AVENUE		INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		
BRANDON VT. 05773		MATERIAL		ENG APPR.		
PHONE (866) 468-8247		FINISH		MFG APPR.		
APPLICATION		DO NOT SCALE DRAWING		Q.A.		SIZE DWG. NO. REV B SLX-44 A
				COMMENTS:		
				SCALE: 1:8 WEIGHT:		SHEET 1 OF 1