
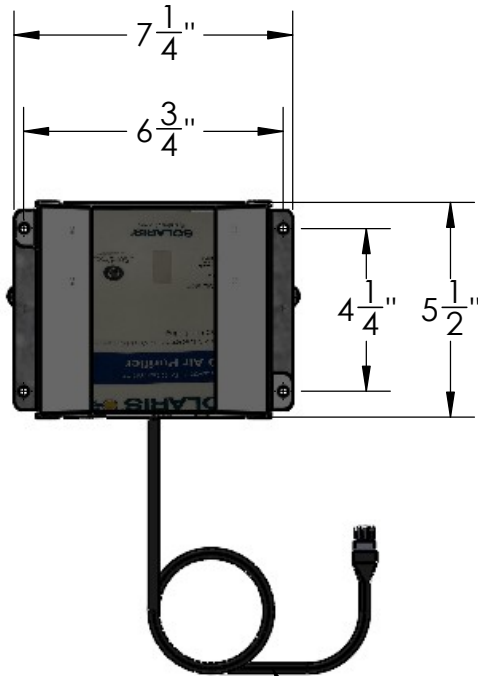




Specifications	
Input Power	120VAC
Replacement Lamp	AS-IH-1024
Lamp Life	Up to 27,000 hrs
Power Consumption	18 Watts
Carbon Content	709 in ² /4.92 ft ²
PCO Coverage	Up to 6.5 tons/3,000 CFM

B

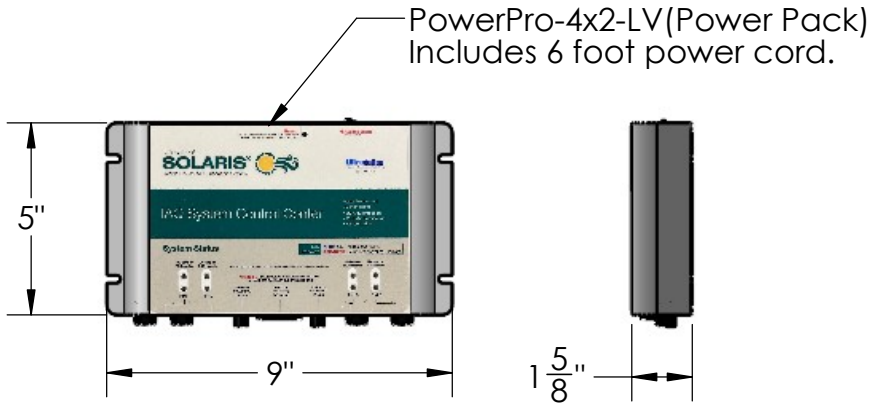

A

3

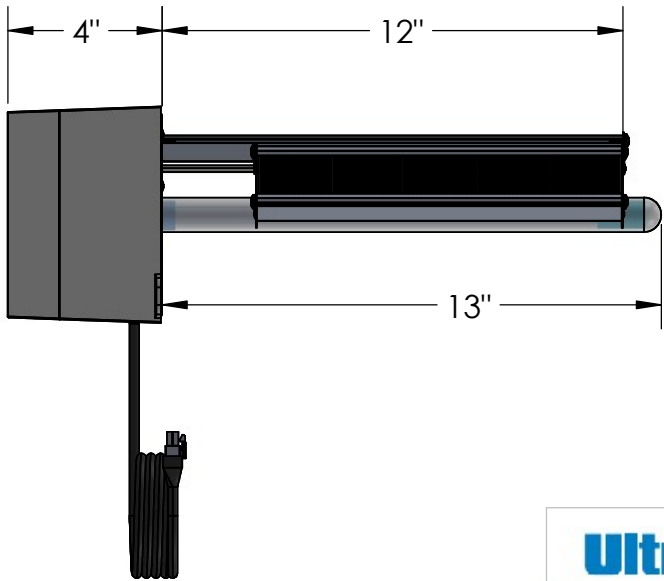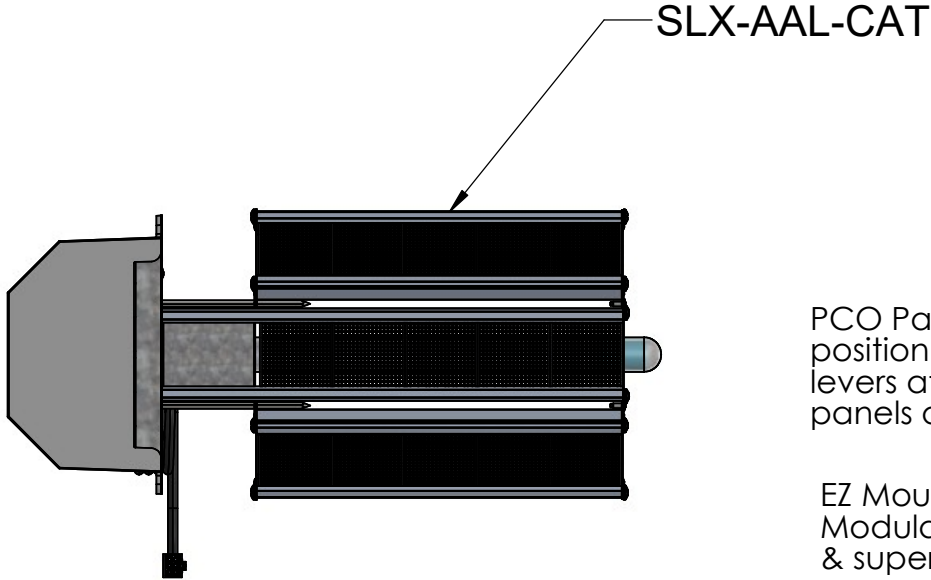


3

2

PCO Panels are shipped closed position. Open using these actuator levers after installation(Never move panels other than with actuators).

EZ Mounting Plate.
Modular design for small footprint & super easy installation/lamp changes

Ø 4 1/4" Recommended Hole size
for Installation



Shown open for
for normal operation



Shown close for
installation

B

A

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
<INSERT COMPANY NAME HERE>. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
<INSERT COMPANY NAME HERE> IS
PROHIBITED.

Ultravation Better Air Better Water Better Living™		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: SLX-C	
ULTRAVATION, INC.		DIMENSIONS ARE IN INCHES		DRAWN	H Kelley		
67 TUBBS AVENUE		TOLERANCES:		CHECKED			
BRANDON VT. 05773		FRACTIONAL ±		ENG APPR.			
PHONE (866) 468-8247		ANGULAR: MACH ± BEND ±		MFG APPR.			
		TWO PLACE DECIMAL ±		Q.A.		SIZE	
		THREE PLACE DECIMAL ±		COMMENTS:		DWG. NO.	
		INTERPRET GEOMETRIC				SLX-C-DDS	
		TOLERANCING PER:				REV	
		MATERIAL				SCALE: 1:4	
		FINISH				WEIGHT:	
APPLICATION		DO NOT SCALE DRAWING				SHEET 1 OF 1	

4

2

1