
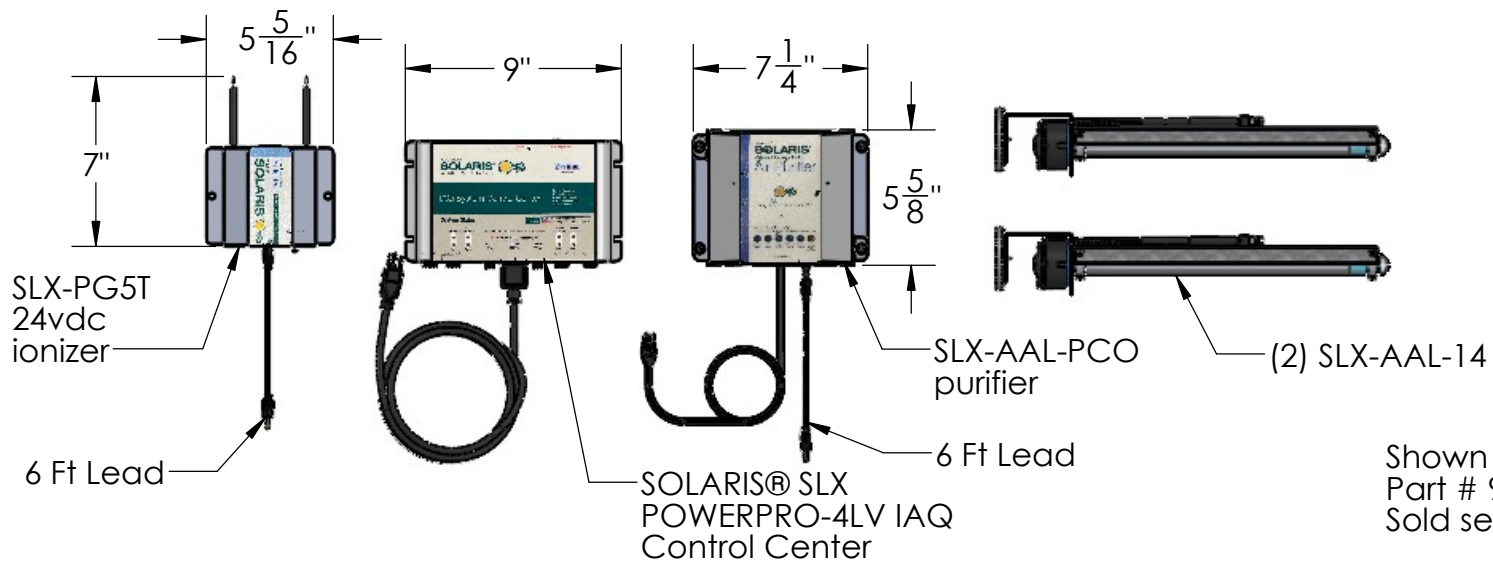


Specifications	
Input Power	120-277 VAC Max
Power Consumption	62 Watts
Replacement Lamp(SLX-AAL-PCO)	AS-IH-1013(18,000 hrs Lamp Life)
Replacement Lamps(SLX-AAL-14)	AS-IH-1024(27,000 hrs Lamp Life)
PCO Coverage	Up to 6.5 tons/3,000 CFM

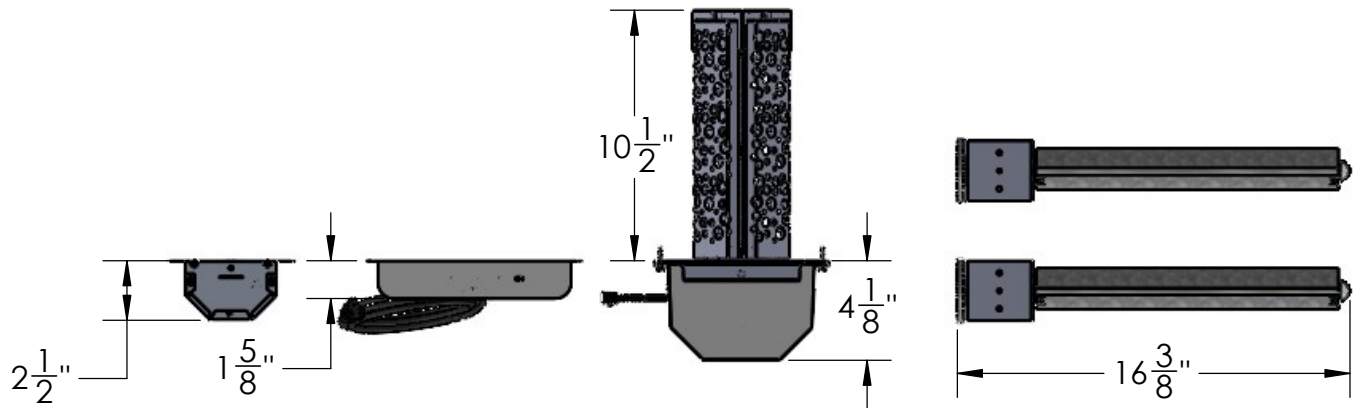

Mount SLX-PG5T before filter

Furnace Configuration

Typical Mounting
SLX-AAL-PCO purifier
Location(Pleumun)

Option 2 Mounting
Locations
(2) SLX-AAL-14

Mount SLX-PG5T before filter(recomended)

Air Handler Configuration

Typical Mounting
SLX-AAL-PCO purifier
Location(Pleumun)

Typical Mounting
(2) SLX-AAL-14
One each side
of coil.

SOLARIS® SLX
POWERPRO-4LV
IAQ Control Center

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ULTRAVATION. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF ULTRAVATION IS
PROHIBITED.

Ultravation® Better Air Better Water Better Living™ ULTRAVATION, INC. 67 TUBBS AVENUE BRANDON VT. 05773 PHONE (866) 468-8247		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: Solaris® SLX POWERPRO-4LV IAQ Control Center with SLX-AAL-PCO purifier, (2) SLX-AAL-14 and SLX- PG5T		
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±		DRAWN	H Kelley	8/4/2026				
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED						
MATERIAL		ENG APPR.						
FINISH		MFG APPR.						
APPLICATION		DO NOT SCALE DRAWING	COMMENTS:		SIZE		DWG. NO.	REV
					B		SLX-P-44-I	A
					SCALE: 1:8		WEIGHT:	SHEET 1 OF 1