
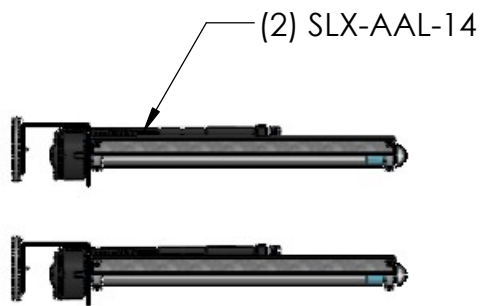
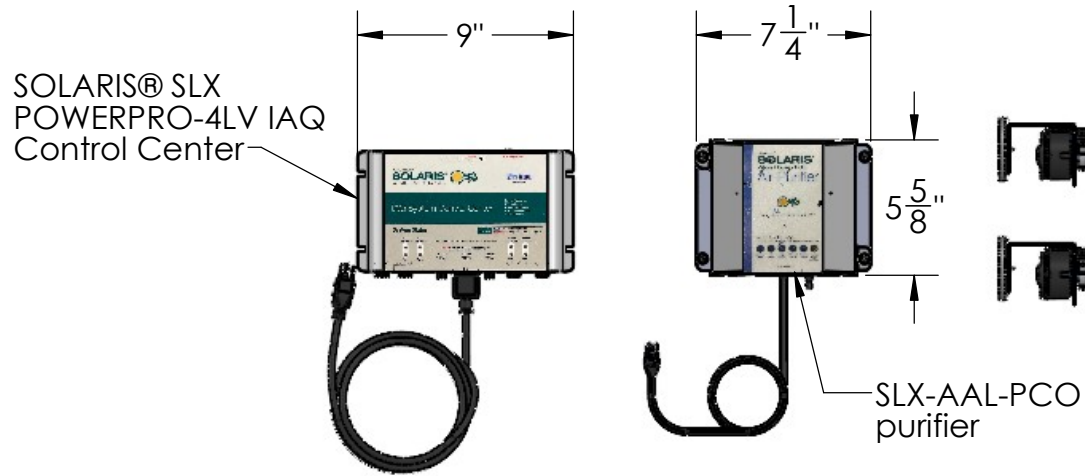


Specifications	
Input Power	120-277 VAC Max
Power Consumption	52 Watts
Replacement Lamp(SLX-AAL-PCO)	AS-IH-1013(18,000 hrs Lamp Life)
Replacement Lamps(SLX-AAL-14)	AS-IH-1024(27,000 hrs Lamp Life)
PCO Coverage	Up to 6.5 tons/3,000 CFM

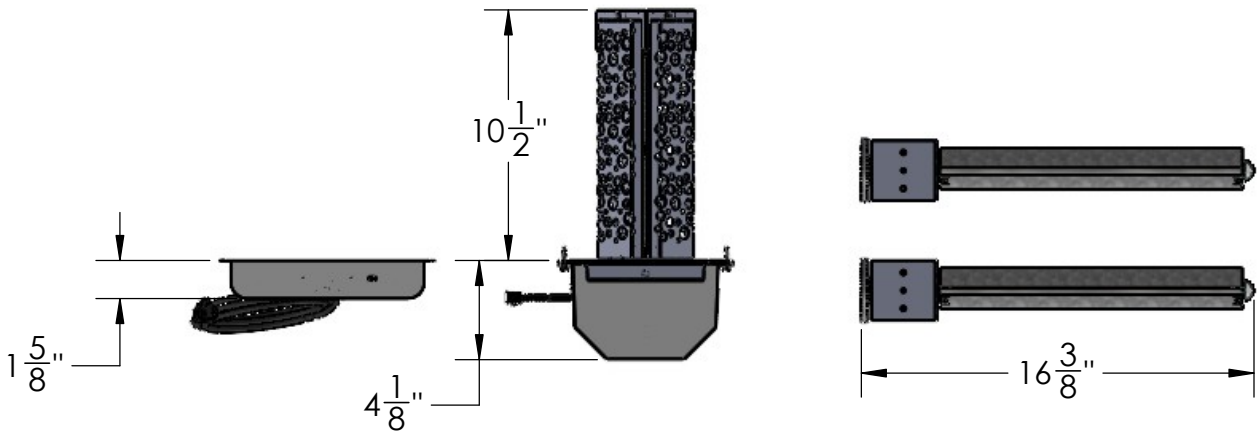

Shown with RAM
Part # 90-027
Sold separately

Typical Mounting
SLX-AAL-PCO purifier
Location(Plemun)

Option 1 Mounting
Locations
(2) SLX-AAL-14

Air Handler Configuration

SOLARIS® SLX
POWERPRO-4LV
IAQ Control Center

Option 2 Mounting
Locations
(2) SLX-AAL-14

Air supply to
rooms

Typical Mounting
SLX-AAL-PCO purifier
Location(Plemun)

Typical Mounting
(2) SLX-AAL-14

SOLARIS® SLX
POWERPRO-4LV
IAQ Control Center

Furnace Configuration

Ultravation® Better Air Better Water Better Living™ ULTRAVATION, INC. 67 TUBBS AVENUE BRANDON VT. 05773 PHONE (866) 468-8247	UNLESS OTHERWISE SPECIFIED:	NAME	DATE	TITLE: Solaris® SLX POWERPRO-4LV IAQ Control Center with SLX-AAL-PCO purifier and (2) SLX-AAL-14 SIZE DWG. NO. REV B SLX-P-44 A SCALE: 1:8 WEIGHT: SHEET 1 OF 1	
	DIMENSIONS ARE IN INCHES	DRAWN	H Kelley		8/4/2026
	TOLERANCES: FRACTIONAL ±	CHECKED			
	ANGULAR: MACH ± BEND ±	ENG APPR.			
	TWO PLACE DECIMAL ±	MFG APPR.			
	THREE PLACE DECIMAL ±	Q.A.			
	INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:			
MATERIAL					
FINISH					
APPLICATION	DO NOT SCALE DRAWING				

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ULTRAVATION. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF ULTRAVATION IS
PROHIBITED.