
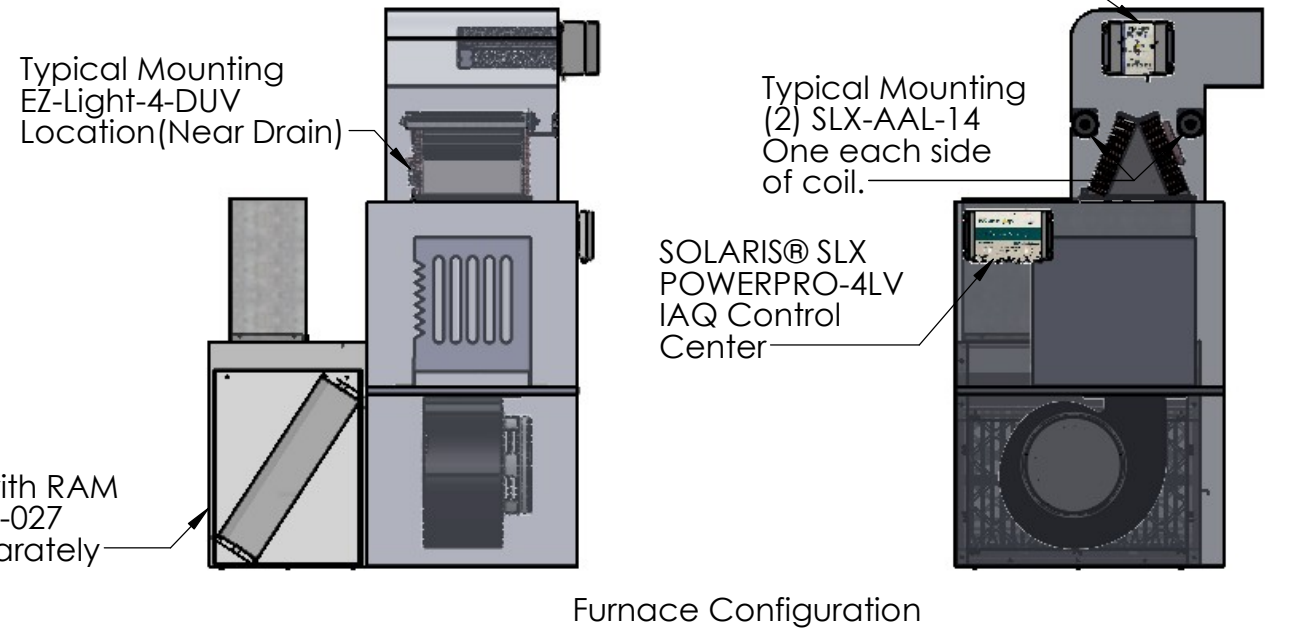
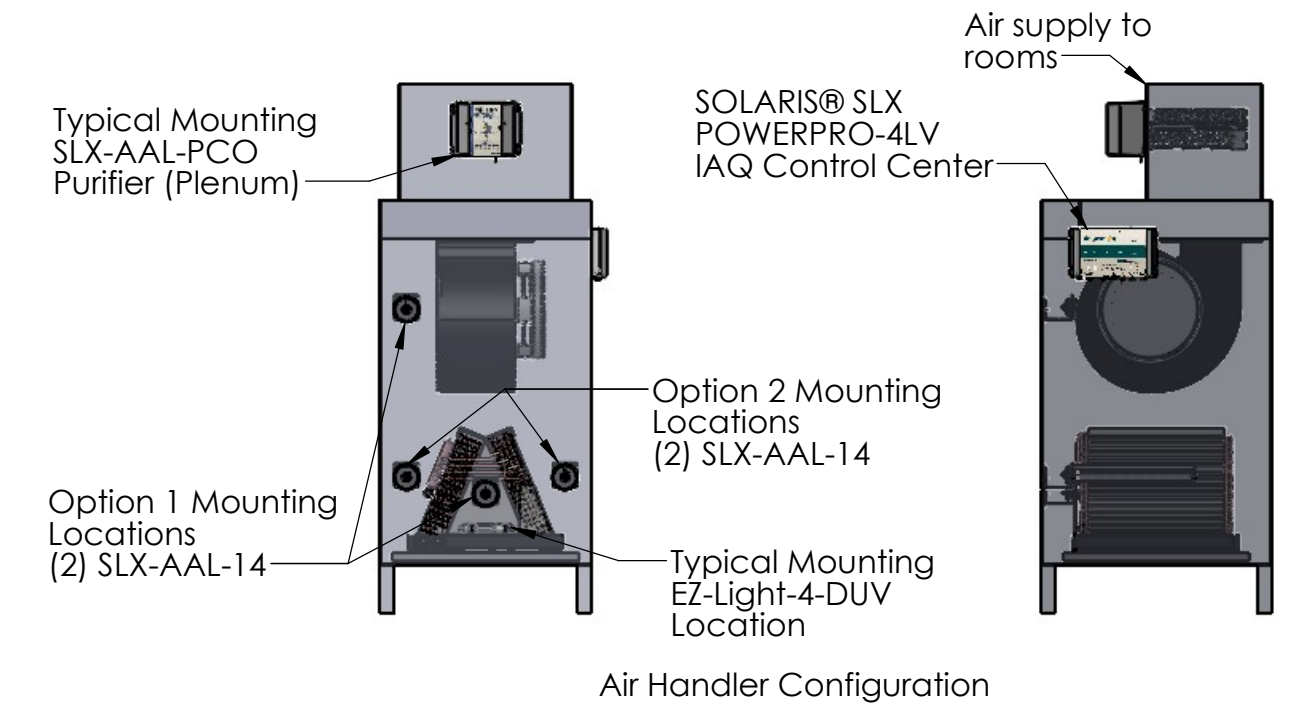


Specifications	
Input Power	120-277 VAC Max
Power Consumption	62 Watts
Replacement Lamp(SLX-AAL-PCO)	AS-IH-1013(18,000 hrs Lamp Life)
Replacement Lamps(SLX-AAL-14)	AS-IH-1024(27,000 hrs Lamp Life)
PCO Coverage	Up to 6.5 tons/3,000 CFM

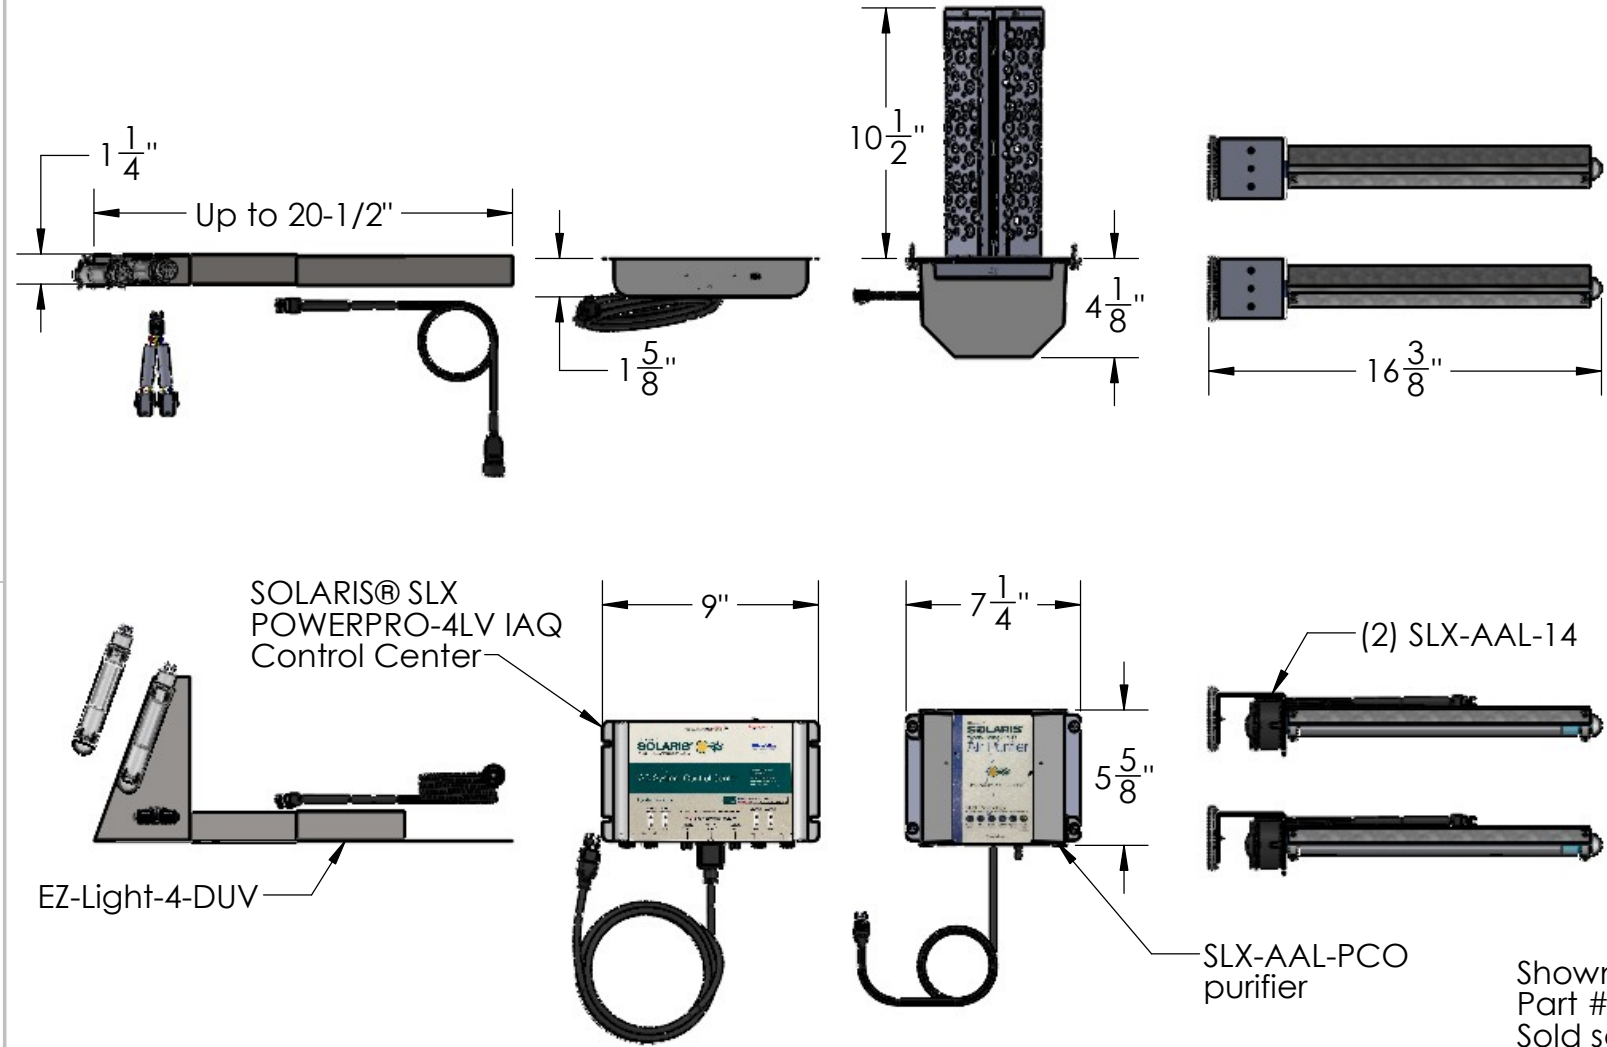

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
ULTRAVATION. ANY REPRODUCTION IN
PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF ULTRAVATION IS
PROHIBITED.

Ultravation Better Air Better Water Better Living™		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: Solaris® SLX POWERPRO-4LV IAQ Control Center with SLX-AAL- PCO purifier, (2) SLX-AAL-14 and EZ-Light-4-DUV
ULTRAVATION, INC.		DIMENSIONS ARE IN INCHES		DRAWN	H Kelley	
67 TUBBS AVENUE		TOLERANCES:		CHECKED		
BRANDON VT. 05773		FRACTIONAL ±		ENG APPR.		
PHONE (866) 468-8247		ANGULAR: MACH ± BEND ±		MFG APPR.		
		TWO PLACE DECIMAL ±		Q.A.		SIZE DWG. NO. REV B SLX-P-445 A
		THREE PLACE DECIMAL ±		COMMENTS:		
		INTERPRET GEOMETRIC TOLERANCING PER:				
		MATERIAL				SCALE: 1:8 WEIGHT: SHEET 1 OF 1
		FINISH				
APPLICATION		DO NOT SCALE DRAWING				