
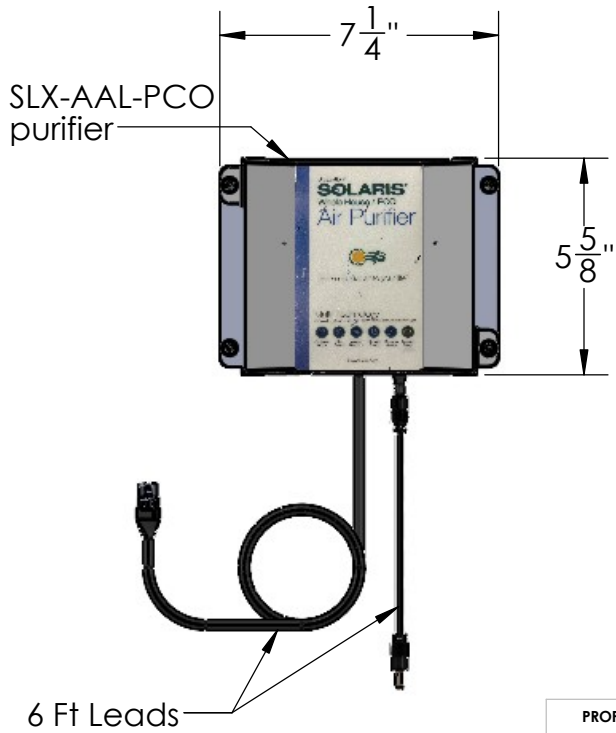
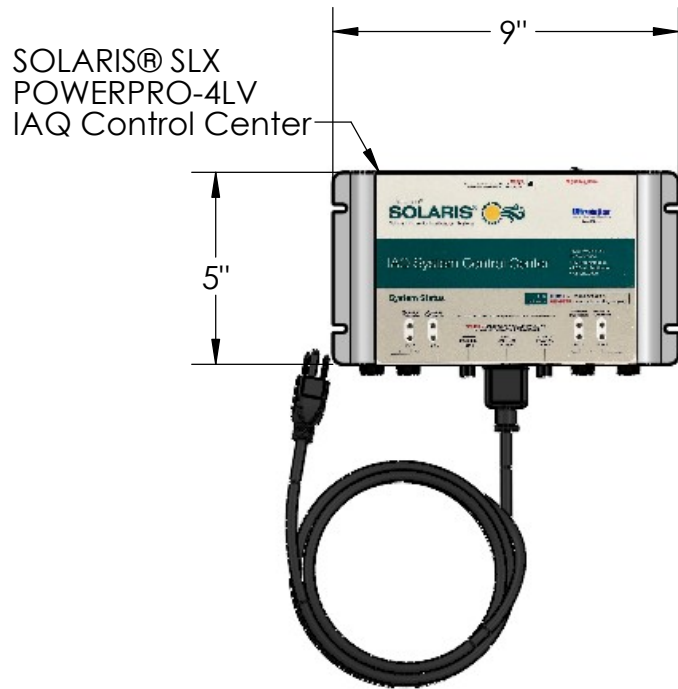



Specifications	
Input Power	120-277 VAC Max
Power Consumption	16 Watts
Replacement Lamp	AS-IH-1013
Lamp Life	18,000 hrs
PCO Coverage	Up to 6.5 tons/3,000 CFM

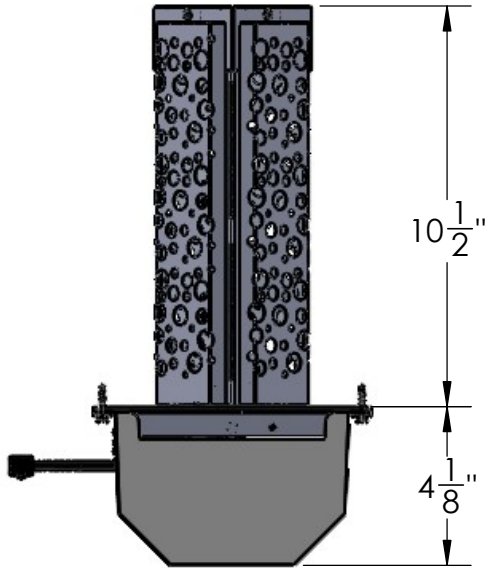


6 Ft Leads

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ULTRAVATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ULTRAVATION IS PROHIBITED.

Typical Mounting
SLX-AAL-PCO purifier
Location(Plenum)

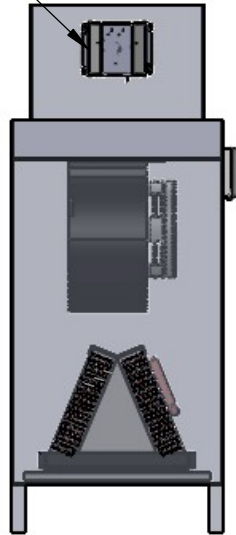


Air supply to
rooms
SOLARIS® SLX
POWERPRO-4LV
IAQ Control Center

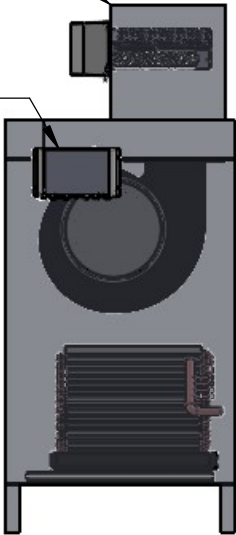


Vertical Configuration

Typical Mounting
SLX-AAL-PCO purifier
Location(Plenum)

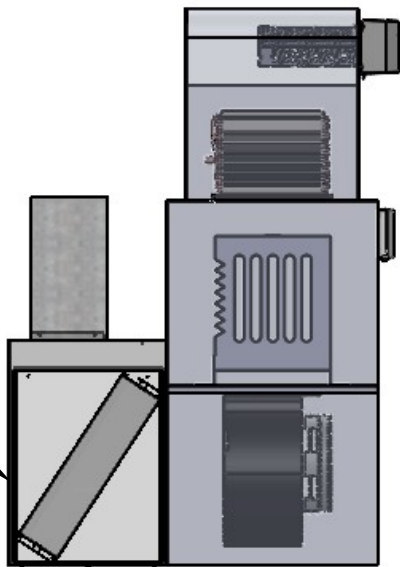

Shown with RAM
Part # 90-027
Sold separately

SOLARIS® SLX
POWERPRO-4LV
IAQ Control Center

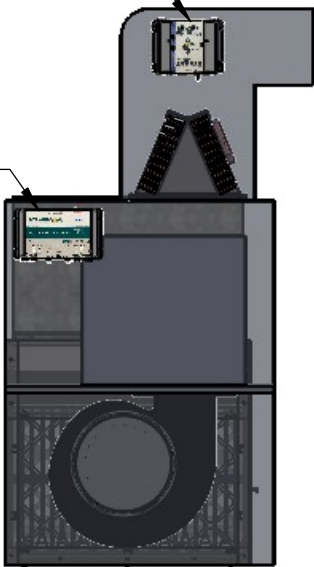

Furnace Configuration

 Better Air Better Water Better Living™ ULTRAVATION, INC. 67 TUBBS AVENUE BRANDON VT. 05773 PHONE (866) 468-8247	UNLESS OTHERWISE SPECIFIED:		NAME	DATE	TITLE: Solaris® SLX POWERPRO-4LV IAQ Control Center with SLX-AAL-PCO purifier		
	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± THREE PLACE DECIMAL ±	DRAWN	H Kelley	8/4/2026			
	INTERPRET GEOMETRIC TOLERANCING PER:	CHECKED					
	MATERIAL	ENG APPR.			SIZE DWG. NO. REV B SLX-P A		
	FINISH	MFG APPR.					
		Q.A.					
	APPLICATION	DO NOT SCALE DRAWING	COMMENTS:				